


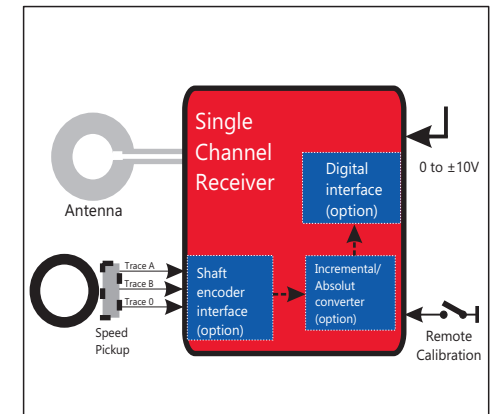

Bandwidth: 0 to 1 kHz (10 kHz)
Output Analogue: Voltage, Current, Frequency
Channel count: up to 3 analogue, up to 10,000 samples 16 channels
Digital Outputs: USB, Ethernet, EtherCAT, CAN
RF power: 1 W, 3 W, 5 W
Transmission: inductive sensor telemetry PCM, Wireless
Integrated filter: 10 Hz, 25Hz, 1 kHz, 5 kHz, 10 kHz (others on request)
Resolution: 16 Bits, 24 Bits
Remote shunt calibration: via pin connection or Software/App
Autozero: via magnet switch, or Software/App
Environmental temperature range: -10 to +70°C (-45 to +85°C)
Supply: 24 (+5%) V DC, 9 to 36 V DC (board supply)

[illegible]