
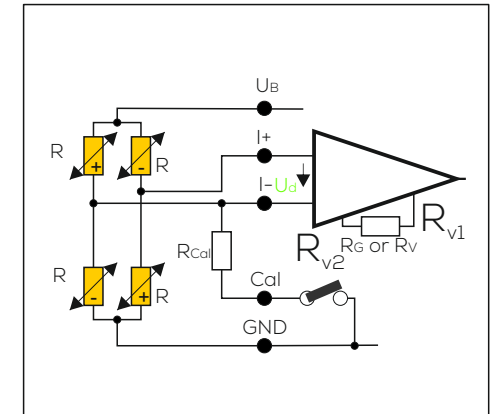
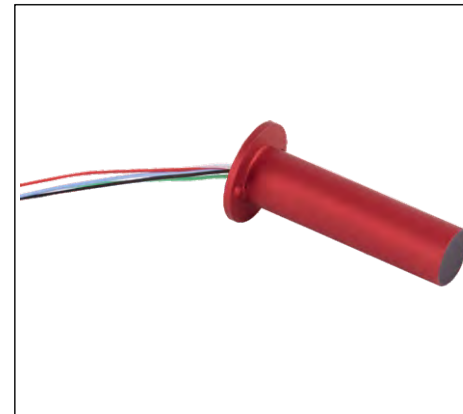


Sensor Signal Amplifier Type 5d (Super Miniature Patrone)

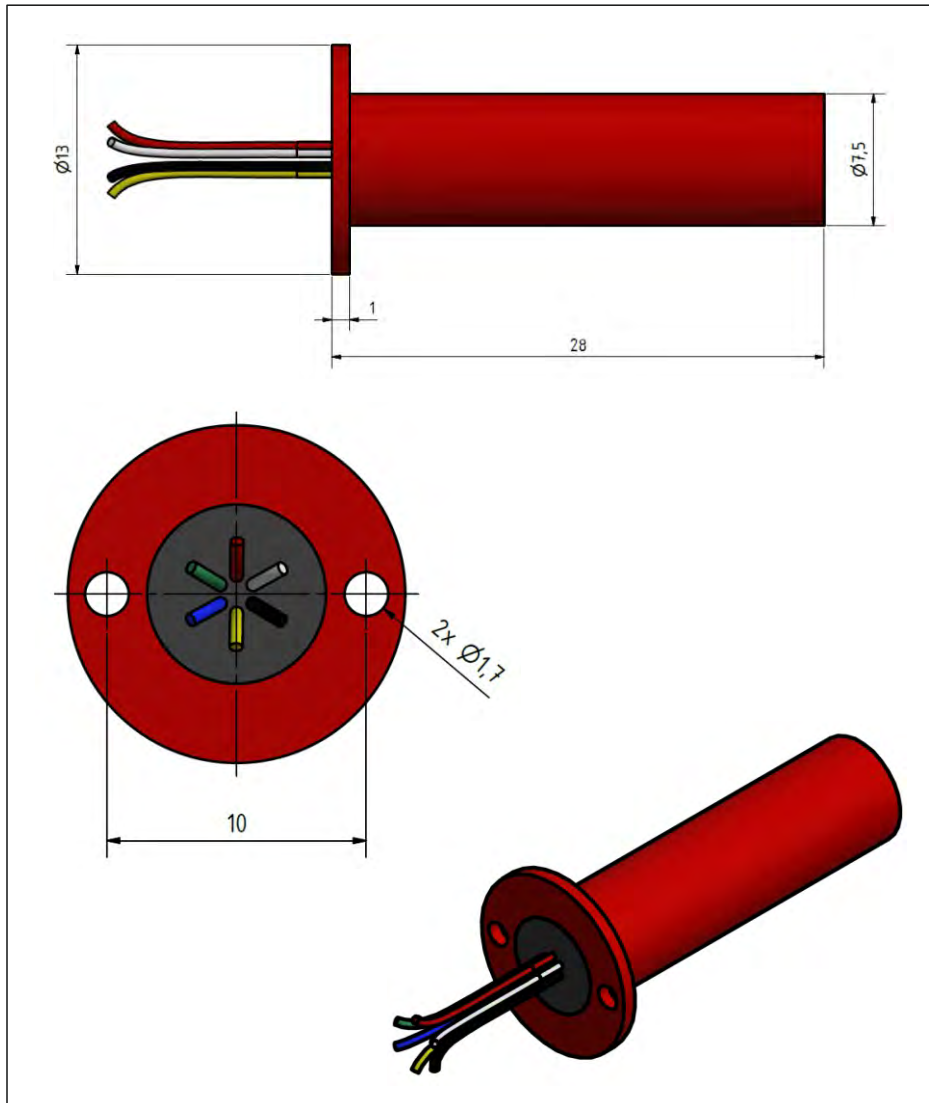

1 Channel PCM Transmitter

For strain gage, PT100, thermocouple

Sensitivity: 0.1 mV/V to 20 mV/V

Bandwidth: 0 (10) Hz to 1 kHz

Strain gage bridge supply: 3.3 V

Strain gage bridge resistance: 350 (120, 1000) Ω

Transmission: inductive sensor telemetry PCM

Integrated filter

Resolution: 16 Bits

Zero point drift: 0.02, (0.01 option)

Environmental temperature range: -25 to +85°C (125°C, 150°C)

Max load: 50 000 g (depending on fixing)

Type: SV_5d_<accuracy>_<temp>_<mod>_<bandwidth>_<TC>

0,02	85	PCM16	1 kHz	-
0,01	125			TC
	150			E
	160			