
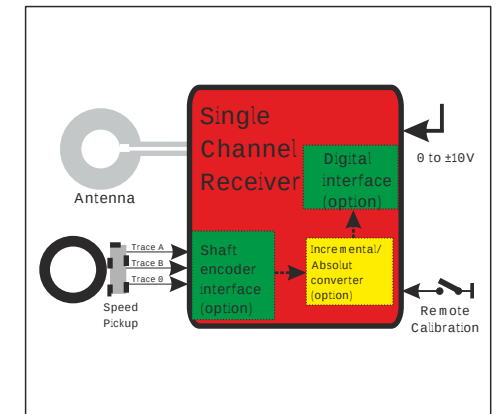


Evaluation Unit (AW_DAnt)

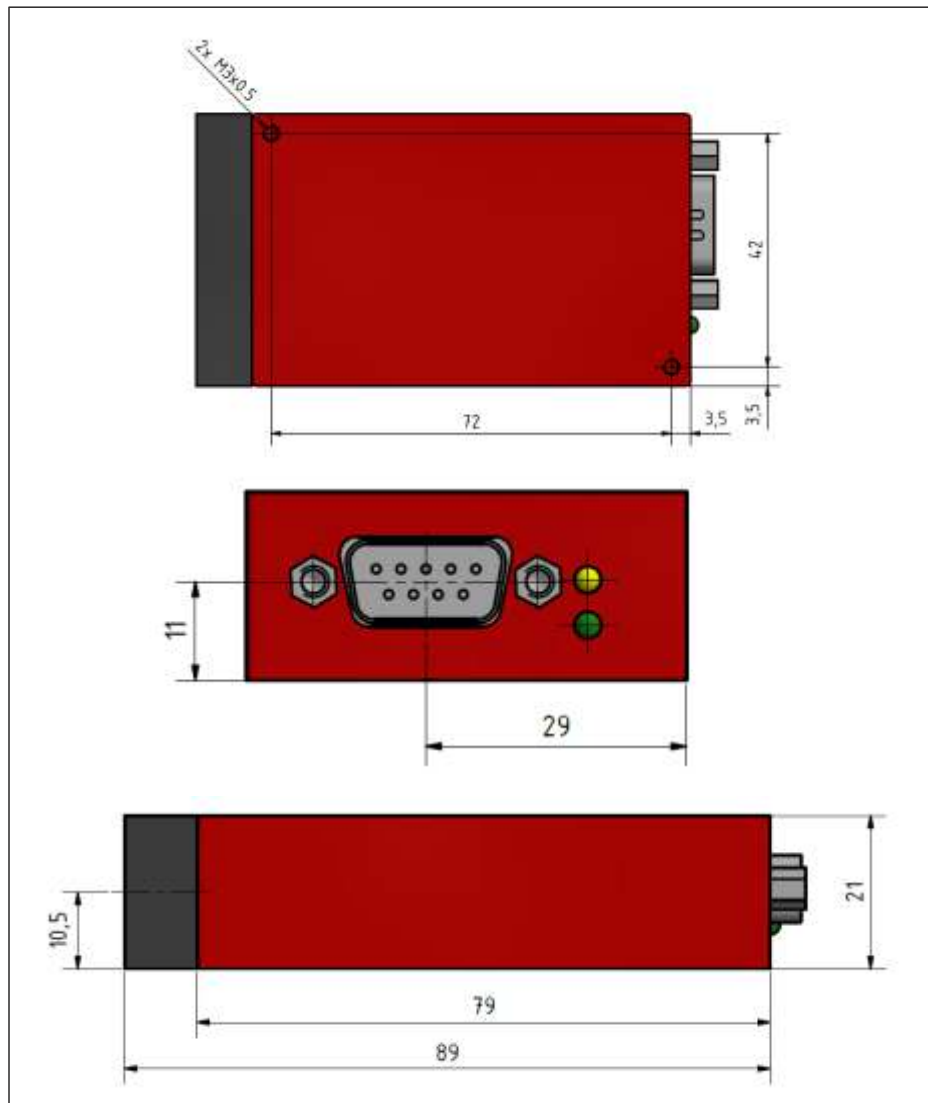

1 Channel PCM Receiver

Bandwidth: 0 to 1 kHz (10 kHz, 40 kHz)

Output: 0 to ±10 V, (0 (4) to 20 mA, frequency, binary)

RF power: 1 W, 3 W

Transmission: inductive sensor telemetry PCM, Wireless

Integrated filter

Resolution: 16 Bits

Remote shunt calibration

Environmental temperature range: -25 to +70°C

Supply: 24/15V

Type: AW_D_<Sys>_<Freq>_<mod>_<bandw>_<supply>_<RF-power>_<outA>_<Dint>_<Dz>_<temp>_<Mo>

-	-	F	1 kHz	15	1W	-	-	70	-	-
InBa	6,8	PCM12	2 kHz	24	3 W	U	F	-45/85	DZ	Hu
Fu	3,4	PCM16	5 kHz			I	B			
InFu		PCM24	10 kHz				USB			