
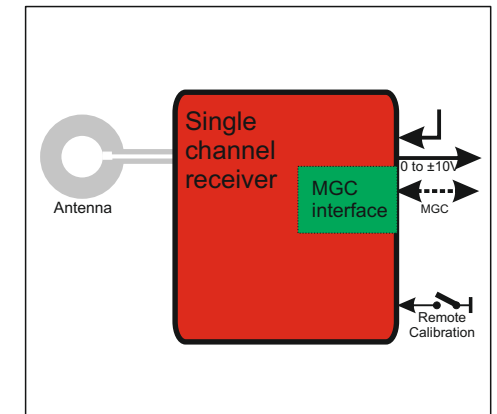
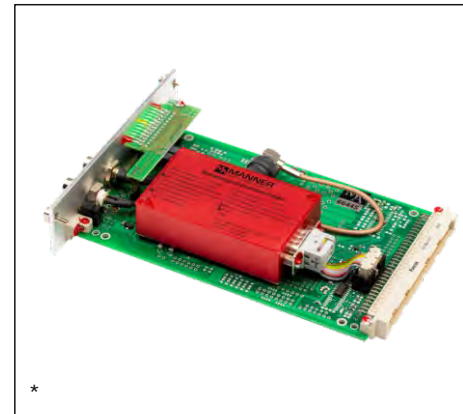


Evaluation MGC Plugin Unit (AW_ES_MGC)

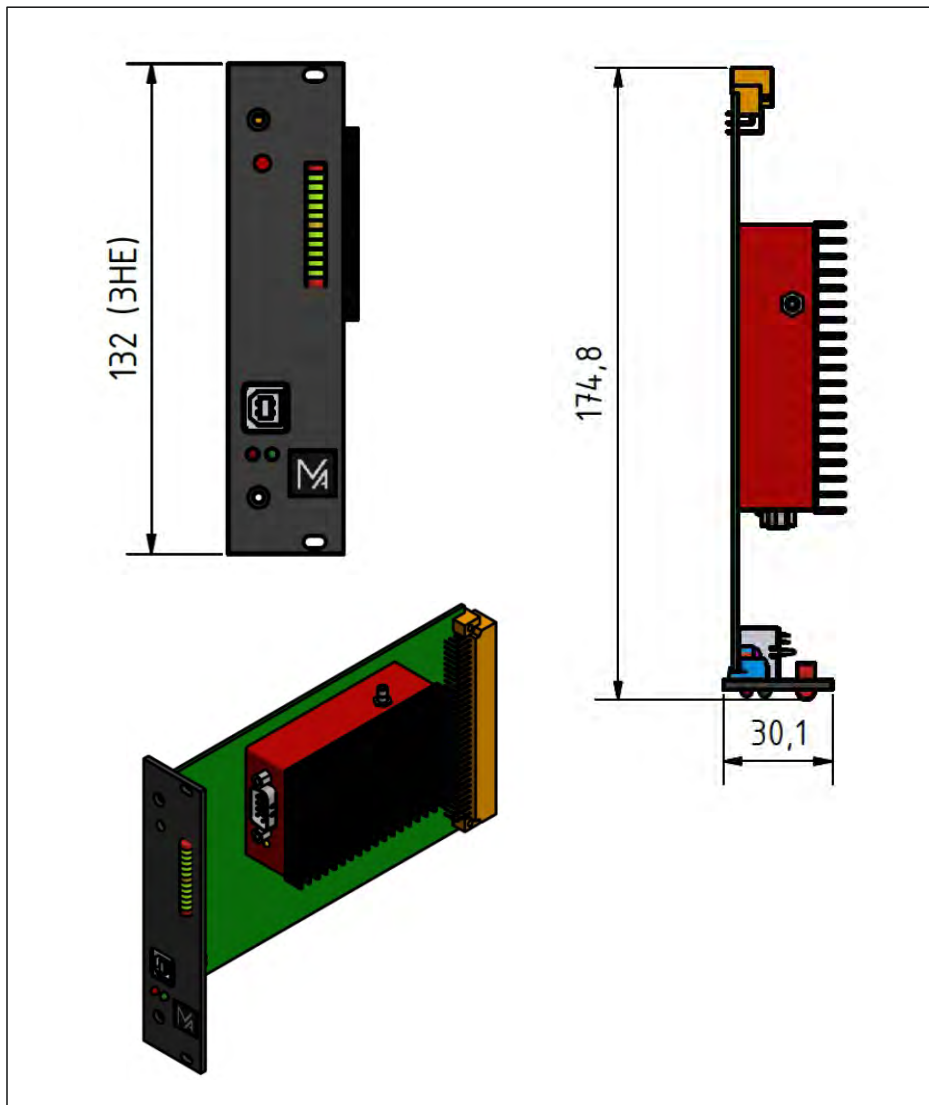

1 Channel MGC-Plugin Unit PCM Receiver

Bandwidth: 0 to 1 kHz
 Output: 5 to 15 kHz
 RF power: 3 W
 Transmission: inductive sensor telemetry PCM, Radio
 Integrated filter
 Resolution: 16 Bits
 Remote shunt calibration
 Environmental temperature range: -10 to +70°C
 Supply: 17 (±5%) VDC, 15 (±2%) V

Type: AW_ES_<Sys>_<Freq>_<mod>_<bandw>_<supply>_<RF-power>_<outA>

-	-	F	1 kHz	17V	2W	Fu
InBa	6,8					PCM16
Fu	3,4					
InFu						